


Asynchronous Restriking CDI - 2 channel

1995-1999 Mitsubishi Eclipse


Thank you for purchasing the Dynatek ARC-2 Ignition. Please take a few moments and read through all of the installation.

1. Turn power / key OFF.
2. Bolt bracket on driver side of engine compartment, between strut tower and power steering fluid canister. (see picture 1)
3. Be careful of adjustment knobs when fastening ARC-2 to bracket. ARC-2 can mount to bracket with switches and knobs facing towards engine or away.
4. Run ARC-2 wire harness to coil pack. (see picture 2&3)
5. Fasten ARC-2 harness with wire ties provided.
6. Use wire ties to fasten tach adapter box to existing wiring.
7. Disconnect car harness from coil pack. (see picture 2)
8. Plug ARC-2 harness connectors between car harness and coil pack. (see picture 2)
9. Run power wires to battery, following existing wire harness along firewall. (see picture 3)
10. Fasten harness with wire ties, and connect to battery with ring terminals.
11. Install fuse on power harness.
12. Set switched to desired settings.
13. Turn on key.


Refer to main instruction sheet for setup and technical information.

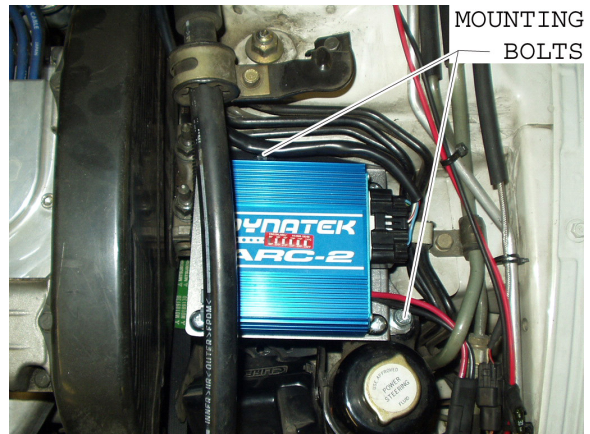

Picture 1

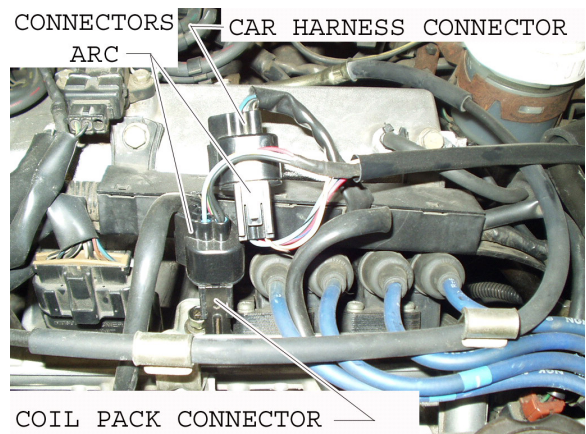

Picture 2

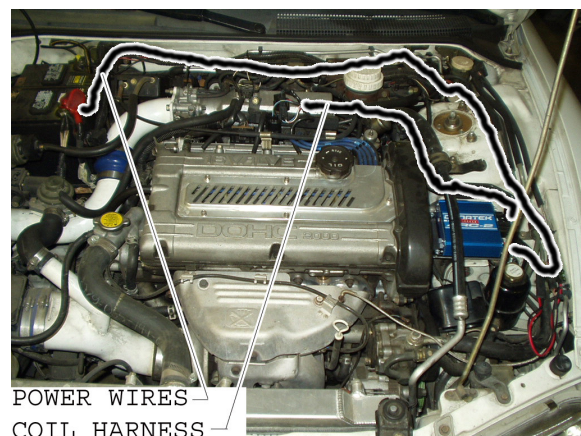

Picture 3

DYNATEK
dyna performance electronics